


DECORATIVE PRODUCT SELECTION

A wide variety of decorative effects can be achieved with our resins and coatings. Some are simple and easy to install, while others require a degree of artistic talent to achieve unique results. Below is a guide to help you select the correct products for your floor. If you have any questions, or a more complex application, please do not hesitate to contact us.



At Xymertec we have a range of specially selected metallic and pearlescent pigments which are perfect for decorative flooring systems. Take a look at the full range [here](#)

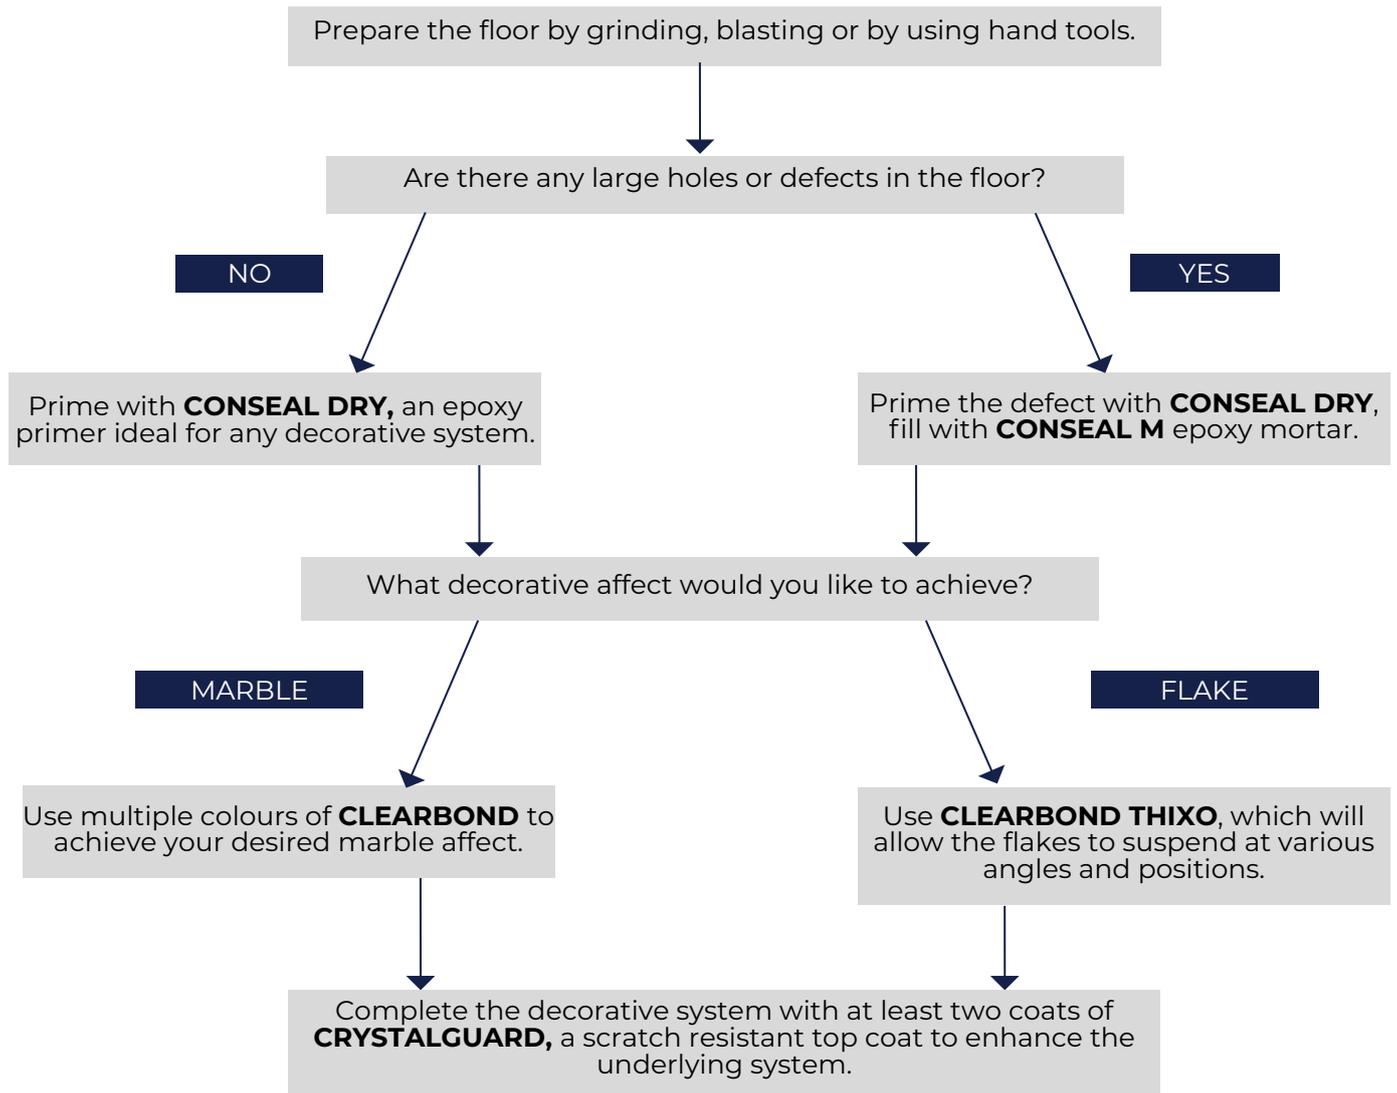

OUR PRODUCTS

CONSEAL DRY

Conseal Dry is an epoxy primer that is excellent for application to old, porous concrete that has been suitably prepared. Can be used under Conseal Self Levelling, Conseal Mortar, and Clearbond. It is designed to seal the surface and prevent air release from the substrate that will spoil the finish.

CONSEAL MORTAR

Conseal Mortar is a specially formulated two part epoxy system that is available with aggregate packs to produce either a fine or course epoxy mortar. It produces an easy to spread mortar that is extremely strong and hard wearing. Ideal for repairing worn out areas and holes.

CLEARBOND AND CLEARBOND THIXO

Is a clear, UV stabilised epoxy resin and hardener that contains a unique blend of additives which produce a perfectly smooth defect free surface. It is available in fluid and thixotropic versions to enable a variety of effects to be achieved, including Marble and Flake.

Clearbond can be used in a wide range of colours, which will allow an unlimited number of beautiful effects which are only limited by the designers imaginations. A Marble effect can be achieved by mixing two or more chosen colours of Clearbond, whereas a Flake effect is achieved by adding flakes to Clearbond Thixo.

CRYSTALGUARD

Crystalguard is a tough, scratch resistant polyaspartic top coat that quickly cures to a transparent film which enhances the beauty of the underlying system. At least two coats should be applied to our decorative systems to protect them from scratches and the effects of UV light.



COVERAGE

It is the applicators responsibility to ensure that the correct coverage is achieved.

We recommend that the area that should be covered by one pack of coating is marked out. Adjust the application rate to ensure that the marked area is covered by the entire contents of a pack. Porous or rough substrates will require more product than regular substrates.

HEALTH & SAFETY

Please see the Safety Data Sheet for full information. All users should ensure appropriate protective measures are adhered to when applying our products.

DISCLAIMER

Customers are advised to thoroughly read and adhere to the instructions provided to ensure the products' optimum finish and performance. All information is based on results gained from experience and tests and is believed to be accurate but is given without acceptance of liability for loss or damage attributable to reliance thereon as conditions of use lie outside our control. Any deviation by the user to these instructions may affect the products performance and is therefore not advised. In this circumstance, Xymertec Ltd will not be held responsible and will be unable to offer any product replacement. Users should always carry out sufficient tests to establish the suitability of any products for their intended applications.

We aim to ensure consistency of colour in production (where applicable), however slight variations in shade may occur from batch to batch.